


Copyright © WallMax India Enterprises Pvt.Ltd, 12/6 Golden Peakock, Mathura Road,Faridabad,Haryana,121003

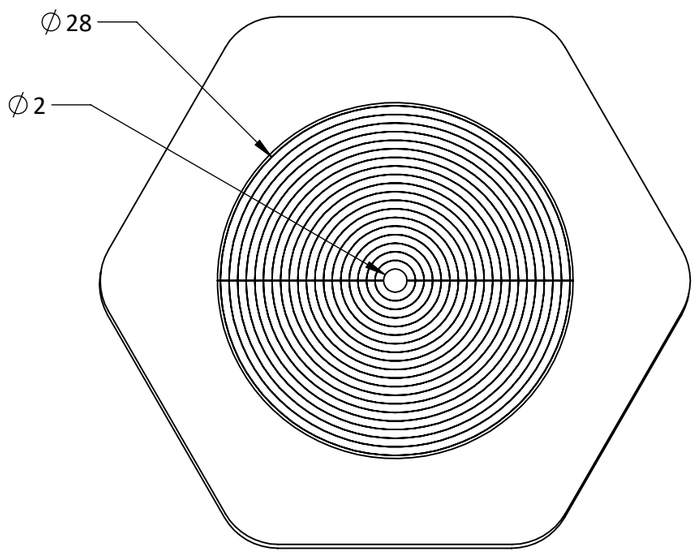

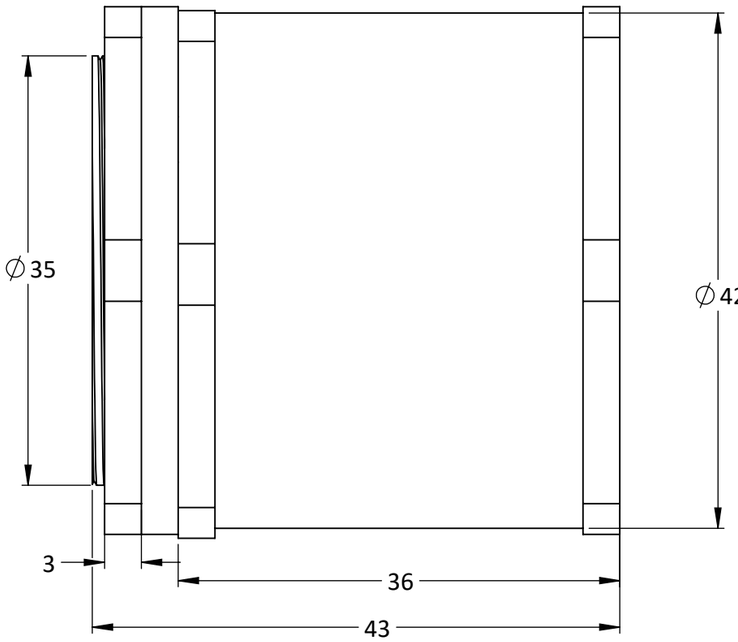

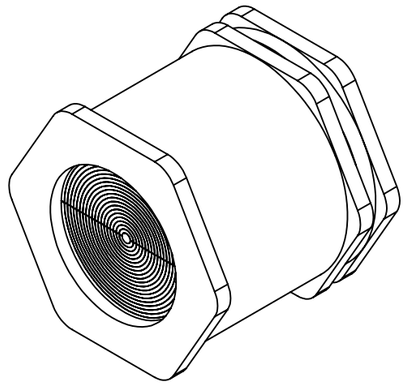

SPECIFICATION

Mounting Method	Bolting
External Dimension (ØxD)	Ø42 mm x 43 mm
Wall Opening (Ø)	Ø36.0 mm to Ø37.0 mm
CABLE DIA(Ø)	Ø2.0 mm to Ø28.0 mm

REACH COMPLIANCE

RoHS COMPLIANT

0.21 kg

SCALE 2:1

ALL DIMENSIONS ARE IN MM GEN. TOL. ± 2.0 MM	Material: EPDM + MS Hardness: N/A	APPV'D	AVINASH K		29-02-24			
		CHK'D	AVINASH K		29-02-24			
Family:- WMC	Surface Finish: ZINC PLATED (20-40)µm	DRAWN	AVIJIT		29-02-24	00	29-02-24	INITIAL RELEASED
			Name	Signature	Date	Rev. No.	Rev. Date	Description of Revision

WallMax India Enterprises Pvt. Ltd.
Faridabad,Haryana
Info@wallmax.it

Part No: WMGMS001	Drawing Type: PRODUCT DATA SHEET	Sheet: A3	Scale: 1:1
Colour: STD	Description: WMGMS M12-M40		Product Group: WMG
			Rev_00

WallMax India Enterprises Pvt. Ltd. reserves the right to modify the technical specifications without prior notice, according to the technical progress. All rights reserved. Reproduction, use or disclosure to third parties withoutexpress consent is strictly forbidden.